


---

# FP-3018-OPS-BMK

## Flat-Panel LCD Replacement for Classic Operator Stations

*A low-maintenance, long life upgrade  
for your TDC 2000 stations*

---

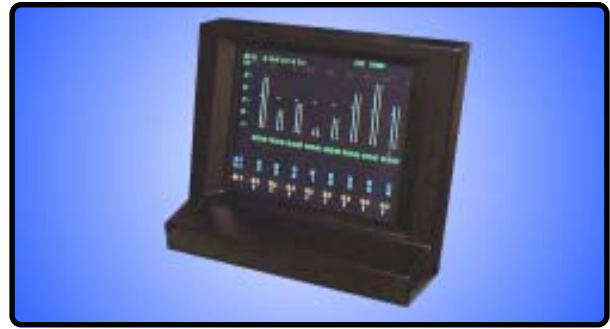

### A high quality replacement display

This LCD flat-panel display was designed as a direct replacement for the aging CRT monitors used in Honeywell's TDC 2000 Operator Station, in classic console furniture. This new high-contrast LCD will give your operators a better quality video display than they have ever seen on a TDC 2000 operator station. To install this display in Honeywell's classic furniture, of mount the new bezel (which contains the LCD display), connect the video, power, and control cables, and the station is ready to place back in service.

### Mounting options

The FP-3018-OPS-BMK is the bezel-mounted version of this display. A tray-mount option is also available, which should be faster to install, since it does not require the replacement of the bezel. The tray-mount option (TMK) attaches the new display to the existing tray, which slides into position as before. The curved inserts in the bezel are replaced with straight inserts to match the flat screen, which results in a 5-6cm setback from the front of the bezel to the display screen. This setback can be eliminated by choosing the bezel-mount option (BMK), where the display is provided pre-mounted in a modified bezel.

Please note that the TMK option costs additional for the tray-mount kit.

### Durable, low maintenance

The solid-state design of the flat-panel TFT LCD display provides inherent reliability, low power consumption, and low maintenance. The LCD screen is protected by anti-reflective glass. Setup adjustments are accomplished using an array of intuitive buttons below the screen for KOP consoles, or a joystick and push button for classic consoles. Once the initial adjustments have been made, the on-screen control feature may be disconnected, preventing unauthorized adjustments to the display.

### Specifications

**Viewable Area:** 18.1" diagonal (14.1" x 11.3")

**Viewing Angle:** 170° horizontal, 170° vertical

**Power Consumption:** 39 watts, 110VAC/240VAC

**Display modes supported:** VGA 640x480 through VESA 1280x1024, includes BOS and EOS scan frequency. BNC adapter included.

**Brightness:** 240 cd/m<sup>2</sup>

**Operating Environment:** Temperature 0-55°C, Relative Humidity < 95% at < 40°C

**Weight:** 10 kg, 22 lb

### Order info:

Specify BMK for classic bezel-mount

Specify TMK for classic tray-mount



**WESTERN PROCESS COMPUTERS, INC.**

2033 W. NORTH LANE, SUITE 14  
PHOENIX, AZ 85021

**Phone: 602-997-7245**

**Fax: 602-997-7248**

**info@westernprocess.com**

**www.westernprocess.com**