
VP-2

Color Video-Printer Interface

*Capture and print plain-paper color copies
and PC bitmap files of your Honeywell
Universal Station screens*

Low-Cost Video Copies

The VP-2 Color Video-Printer Interface captures a screen image from a Honeywell TDC 3000 Universal Station, TDC 2000 Operator Station, or 45000 PMX station and sends the output to an HP-compatible inkjet or laser printer. Using an industry-standard plain-paper printer gives you low-maintenance, low-cost color copies of your Honeywell video screens.

Great Color from Standard Printers


The VP-2 will print in color to almost any Hewlett Packard DeskJet printer (which supports HP's PCL3 or PCL5 printer control language), or any color printer using Adobe PostScript. You can choose economical color printing on a white background, where white and yellow from the video screen are mapped to more-legible black and orange or brown. An optional true-color mode prints all colors as they appear on the display.

Use Captured Images on your PC

In addition to printing a hard copy, the VP-2 stores your last 9 image captures in .BMP format. These files may be transferred to a 3½" floppy diskette for use in word processing and presentation programs on a PC.

Easy Hookup and Operation

The VP-2 is external to the console, and requires no software changes to the station itself. It is connected to the video signal between the EPDG I/O card and the monitor using a 9-conductor ribbon cable supplied with the VP-2. Initial adjustment and configuration is done using a four-button keypad and LCD display. In operation, a remote push-button initiates screen capture.

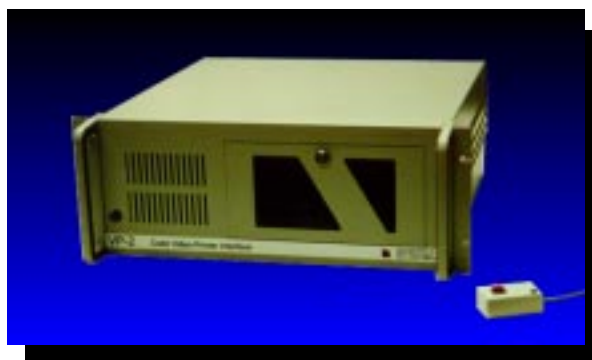

Specifications

Voltage Requirements: The VP-2 will operate on 115VAC or 230VAC 50/60Hz. Power consumption is 45 Watts.

Duty Cycle: The VP-2 can be powered on continuously.

Physical: Heavy-duty industrial metal case, 7" x 19" x 17.8". May be mounted in a 19" rack. Weight 33.5 lbs. Available in a smaller 6½" x 6½" x 15½" enclosure for \$450 more (model VP-2s).

Operator Controls: Power switch, reset button, 4-button setup keypad, and a 2 x 16 character LCD display in a lockable compartment or (remote panel with VP-2s).

Remote control module with large pushbutton to initiate a capture. This module also has a green LED which indicates ready, busy, or error operating condition. It includes a 6-foot cord, 25 and 50 foot extensions available.

Capture time: 2½ seconds to capture all 3 color video signals. Sequence of capture is red, green, then blue.

Print time: Print speed is mainly determined by the speed of the printer. HP DeskJet 850C - 1:18, HP DeskJet 1600C - 1:44, HP DeskJet 550C - 5:40.

Price: \$5,495 or \$5,945 for VP-2s (without printer)



WESTERN PROCESS COMPUTERS, Inc.
2033 W. North Lane, Suite 14
Phoenix, AZ 85021

**Phone: (800) 997-7245
(602) 997-7245**

Fax: (602) 997-7248

**info@westernprocess.com
www.westernprocess.com**